


MARK	DATE	REVISION	REVISER	APP.BY
①				
②				
③				

MODEL NO		QT50L-BZ				
MATERIAL		HOUSING-PC LENS-PC COVER-PC				
COLOR OF LENS		RED( ), AMBER( ), GREEN( ), BLUE( ), WHITE( )				
KIND OF FUNCTION		USE VOLT.	STEADY	FLASHES	STROBE	REVOLVING
LED MODULE	USE VOLT.	LAYER 1 CURRNET (MAX.)	DC12V	0.090A	0.090A	0.110A 0.070A
			DC24V	0.050A	0.050A	0.110A 0.070A
			AC110V	0.020A	0.020A	- -
BUZZER MODULE	USE VOLT.	CURRNET (MAX.)	DC12V	0.015A		
			DC24V	0.030A		
			AC110V	0.090A		
AC220V	0.090A					
PROTECTION GRADE		WATER & DUST PROOF IP65				
CABLE ENTRY		ø8 LEAD HOLE				
COLOR OF HOUSING		MAKER STANDARD				
ACTION		LED SIGNAL TOWER LAMP				

LAYER	L
1	346
2	387
3	428
4	469

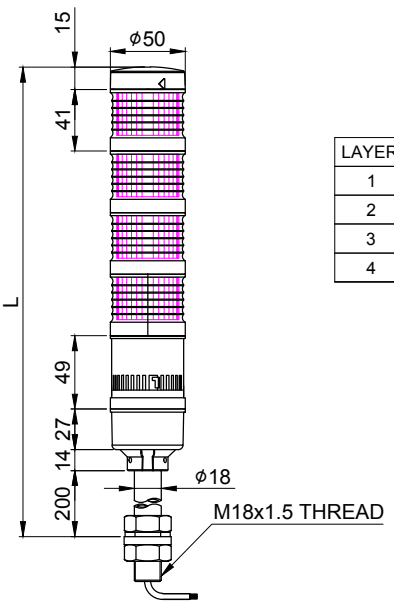

FOR LINEAR DIMENSIONS	ISO2768-1 : CLASS OF TOLERANCE					SURFACE FINISH
	f	m	(C)	v		
0.5~3	±0.05	±0.1	±0.2	-		
3~6			±0.3	±0.5		
6~30	±0.1	±0.2	±0.5	±1		
30~120	±0.15	±0.3	±0.8	±1.5		
120~400	±0.2	±0.5	±1.2	±2.5		
400~1000	±0.3	±0.8	±2	±4		
FOR ANGULAR DIMENSIONS	0~10	±1°	±1°30'	±3°		
	10~50	±0°30'	±1°	±2°		
	50~120	±0°20'	±0°30'	±1°		
	120~400	±0°10'	±0°13'	±0°30'		

Nr.	DWG. NO.	TITLE/ NAME		MAT'L	QTY	REFERENCE
DSND BY	CHKD BY	CHKD BY	APRV BY	VIEW	DATE	
S.H.KIM	J.H.PARK		J.K.HAN	3	2019.03.20	
TITLE			MODEL			
QT50L-BZ OUTLINE DRAWING			QT50L-BZ			
			DWG. NO.			
			QT50L-BZ_OUT			
SCALE	SIZE	REV	SHEET			
N/S	A4	00	1/1			