



1 2 3 4 5 6

A

A

ST45B : AC/DC
ST45B-BZ : AC/DC
ST45BF : AC/DC

ST45BF-BZ : AC/DC

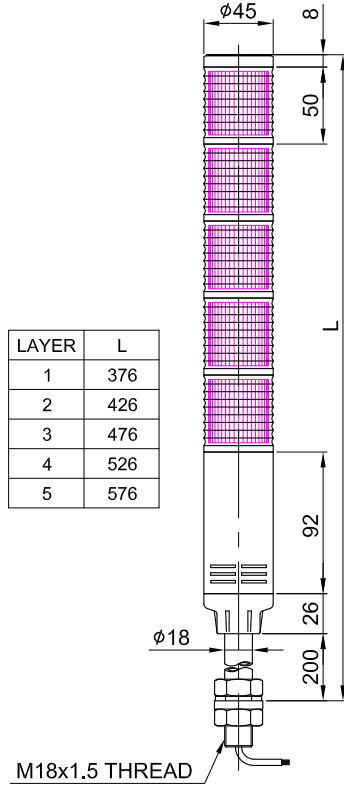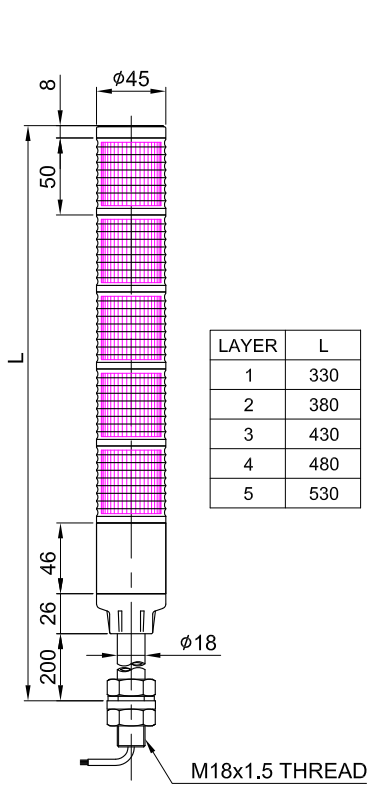

MARK	DATE	REVISION	REVISER	APP .BY
△				
△				
△				

MODEL NO		ST45B				
MATERIAL		HOUSING-ABS				
		LENS-AS				
		POLE-AL				
COLOR OF LENS		RED(), AMBER(), GREEN(), BLUE(), WHITE()				
FLASHING PER MIN.		60 ~ 80				
USE VOLT.	BULB	CURRENT	DC12V	5W	MAX. 0.398A	LAYER1
			DC24V		MAX. 0.212A	LAYER1
			AC110V		MAX. 0.048A	LAYER1
			AC220V		MAX. 0.023A	LAYER1
VOLUME		MAX. 90dB at 1m				
PROTECTION GRADE		WATER & DUST PROOF IP44(Buzzer Type IP23)				
CABLE ENTRY		ø8 LEAD HOLE				
COLOR OF HOUSING		MAKER STANDARD				
ACTION		BULB STEADY/ FLASHING SIGNAL TOWER LAMP				

B

B

C

C

D

D

FOR LINEAR DIMENSIONS	ISO2768-1 : CLASS OF TOLERANCE					SURFACE FINISH
	f	m	⊙	v		
0.5-3			±0.2			
3-6	±0.05	±0.1	±0.3	±0.5		
6-30	±0.1	±0.2	±0.5	±1		
30-120	±0.15	±0.3	±0.8	±1.5		
120-400	±0.2	±0.5	±1.2	±2.5		
400-1000	±0.3	±0.8	±2	±4		
FOR ANGULAR DIMENSIONS	0-10	±1°	±1°30'	±3°		
	10-50	±0°30'	±1°	±2°		
	50-120	±0°20'	±0°30'	±1°		
	120-400	±0°10'	±0°13'	±0°30'		

Nr.	DWG. NO.	TITLE/ NAME	MAT'L	1	-
DSND BY	CHKD BY	CHKD BY	APRV BY	VIEW	DATE
S.H.KIM	J.H.PARK		J.K.HAN	3	2016.08.30
TITLE			MODEL		
ST45B OUTLINE DRAWING			ST45B		
DWG. NO.			ST45B_OUT		
SCALE	SIZE	REV	SHEET		
N/S	A4	00	1/1		

1 2 3 4 5 6

A4(297X210)

