

1 2 3 4 5 6

A

A

B

B

C

C

D


D

MARK	DATE	REVISION	REVISER	APP .BY
①				
②				
③				

STC56L : DC  
STC56LF : DC

STC56L : AC  
STC56LF : AC  
STC56L-BZ : DC  
STC56LF-BZ : DC

STC56L-BZ : AC  
STC56LF-BZ : AC

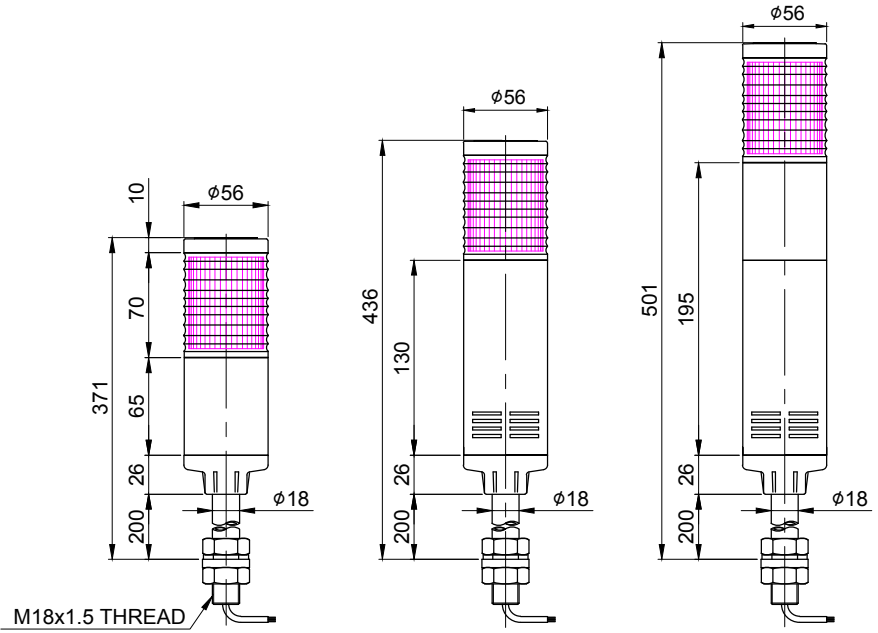

MODEL NO		STC56L			
MATERIAL		HOUSING-ABS LENS-AS POLE-AL			
COLOR OF LENS		CLEAR			
FLASHING PER MIN.		60 ~ 80			
USE VOLT.	LED	CURRENT	DC12V	0.08W	0.277A
			DC24V		0.188A
			AC110V		0.057A
			AC220V		0.028A
VOLUME		MAX. 90dB at 1m			
PROTECTION GRADE		WATER & DUST PROOF IP44(Buzzer Type IP23)			
CABLE ENTRY		φ8 LEAD HOLE			
COLOR OF HOUSING		MAKER STANDARD			
ACTION		MULTIPLE COLORS LED SIGNAL STEADY/ FLASHING LIGHT			

FOR LINEAR DIMENSIONS	ISO2768-1 : CLASS OF TOLERANCE				
	f	m	(C)	v	
0.5~3	±0.05	±0.1	±0.2	-	
3~6			±0.3	±0.5	
6~30	±0.1	±0.2	±0.5	±1	
30~120	±0.15	±0.3	±0.8	±1.5	
120~400	±0.2	±0.5	±1.2	±2.5	
400~1000	±0.3	±0.8	±2	±4	
FOR ANGULAR DIMENSIONS	0~10	±1°	±1°30'	±3°	
	10~50	±0°30'	±1°	±2°	
	50~120	±0°20'	±0°30'	±1°	
	120~400	±0°10'	±0°13'	±0°30'	

SURFACE FINISH		-		1	
Nr.	DWG. NO.	TITLE/ NAME		MAT'L	QTY
DSND BY	CHKD BY	CHKD BY	APRV BY	VIEW	DATE
S.H.KIM	J.H.PARK		J.K.HAN	3	2019.03.20
TITLE			MODEL		
STC56L OUTLINE DRAWING			STC56L		
			DWG. NO.		
			STC56L_OUT		
SCALE	SIZE	REV	SHEET		
N/S	A4	00	1/1		

1 2 3 4 5 6

A4(297X210)