

1 2 3 4 5 6

A

A

B

B

C



C

D


D

MARK	DATE	REVISION	REVISER	APP .BY
△				
△				
△				

MODEL NO		S50B		
MATERIAL		HOUSING-ABS		
		LENS-AS		
COLOR OF LENS		RED(), AMBER(), GREEN(), BLUE()		
USE VOLT.	BULB	CURRENT	DC12V	MAX. 0.437A
			DC24V	MAX. 0.290A
			AC110V	MAX. 0.051A
			AC220V	MAX. 0.025A
PROTECTION GRADE		WATER & DUST PROOF IP44		
CABLE ENTRY		φ9 LEAD HOLE		
COLOR OF HOUSING		MAKER STANDARD		
ACTION		BULB STEADY WARNING LIGHT		

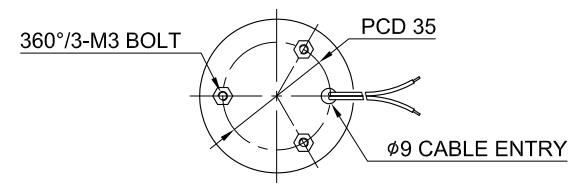

ISO2768-1 : CLASS OF TOLERANCE						SURFACE FINISH
FOR LINEAR DIMENSIONS		f	m	⊙	v	
		0.5~3			±0.2	-
	3~6	±0.05	±0.1	±0.3	±0.5	
	6~30	±0.1	±0.2	±0.5	±1	
	30~120	±0.15	±0.3	±0.8	±1.5	
	120~400	±0.2	±0.5	±1.2	±2.5	
	400~1000	±0.3	±0.8	±2	±4	
FOR ANGULAR DIMENSIONS	0~10	±1°		±1°30'	±3°	
	10~50	±0°30'		±1°	±2°	
	50~120	±0°20'		±0°30'	±1°	
	120~400	±0°10'		±0°13'	±0°30'	

-	-	-	-	1	-
Nr.	DWG. NO.	TITLE/ NAME	MAT'L	QTY	REFERENCE
DSND BY	CHKD BY	CHKD BY	APRV BY	VIEW	DATE
S.H.KIM	J.H.PARK		J.K.HAN	3	2016.08.30
TITLE			MODEL		
S50B OUTLINE DRAWING			S50B		
			DWG. NO.		
			S50B_OUT		
SCALE	SIZE	REV	SHEET		
N/S	A4	00	1/1		

1 2 3 4 5 6 A4(297X210)